




İMAJ TEKNİK
ELEKTRİK ELEKTRONİK MALZ. SAN. VE TİC. LTD. ŞTİ.

Ordering code: Contactor for battery voltages



Example: **C165 H/ 24RX-V1 001**

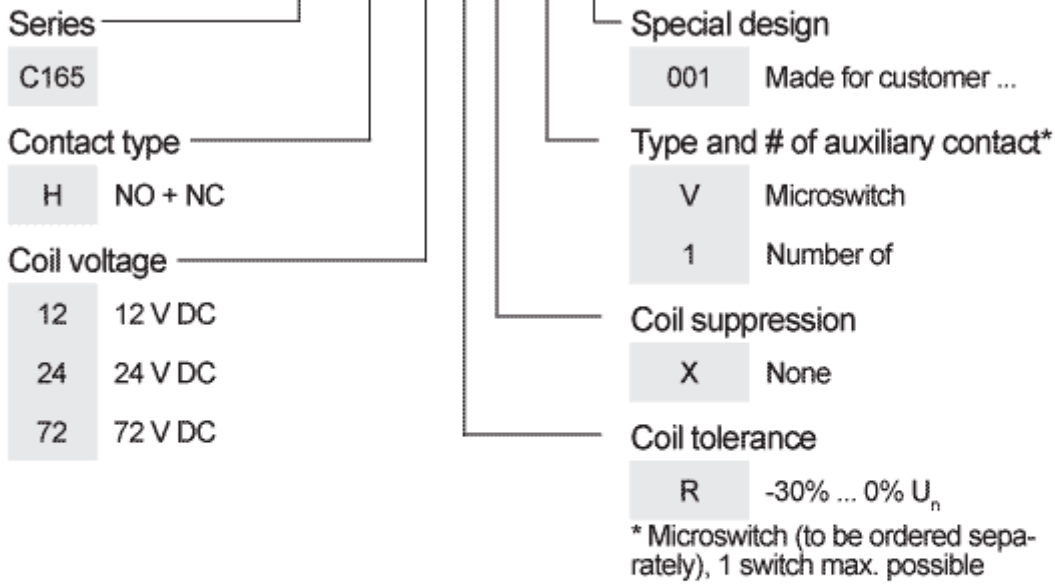

Type C contactors are NO contactors fitted with magnetic blowout. Here the NO contact functions as circuit-breaker within an open contact design. Type H contactors, however, feature an additional NC contact which is galvanically isolated and has a potential of its own. **So, for type H SPDT contactors is to be observed that only the NO contact may be used for breaking the circuit, whereas the NC contact should only be used for power transmission functions.**

İMAJ

adresimiz değişti
Emekyemez Mah.Yüksek Minare Sk. No:8 / 17
80020 Karaköy / İstanbul
Tel:212/2359535
Fax:212/2359537