


[close window](#)

Ordering code: Contactor for battery voltages

Example: **C164 C/ 24RX-V1 001**

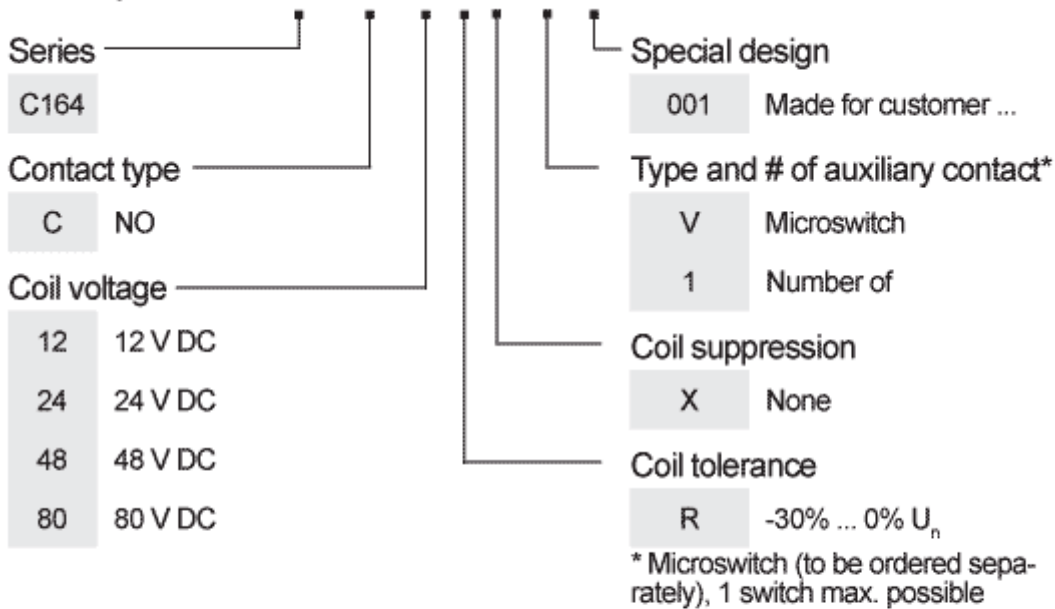

Type C contactors are NO contactors fitted with magnetic blowout. Here the NO contact functions as circuit-breaker within an open contact design.

Type I contactors, however, feature an additional NC contact which is galvanically isolated and has a potential of its own. **So, for type I SPDT contactors is to be observed that only the NO contact may be used for breaking the circuit, whereas the NC contact should only be used for power transmission functions.**